

照明器具配光データシート

名称	ベースライト
型式	BSL-50W-50K

光源データ	
光源	LED
光束	7210 lm
色温度	5000 K
1/2 ビーム角	104°
1/10 ビーム角	158°

灯具仕様			
定格電圧	100V/200V	定格電流	0.53A/0.27A
消費電力	53W/52W		
固有エネルギー消費効率	136.0lm/W, 138.6lm/W		




最大取付間隔	
A-A	1.21 H
B-B	1.19 H

備考	

※ A:上下 B:左右

反射率	天井				壁				50				30				0
	80	70	50	10	70	50	30	10	70	50	30	10	70	50	30	10	
床	10				10				10				10				0
室指数	照明率(×0.01)																
0.6	58	46	39	34	57	46	39	34	54	45	38	34	52	44	38	34	32
0.8	67	56	48	43	65	55	48	43	63	54	47	42	60	52	47	42	40
1	73	63	56	50	72	62	55	50	69	61	55	50	66	59	54	49	47
1.25	79	70	63	58	78	69	63	57	75	67	62	57	72	66	61	57	54
1.5	83	75	69	63	82	74	68	63	79	72	67	63	76	71	66	62	60
2	89	82	77	72	88	81	76	72	85	79	75	71	82	78	74	70	68
2.5	93	87	82	78	91	86	82	78	89	84	80	77	86	82	79	76	74
3	95	90	86	83	94	89	85	82	91	87	84	81	88	85	82	80	77
4	98	94	91	88	97	93	90	87	94	91	88	86	92	89	87	85	82
5	100	97	94	91	98	96	93	91	96	93	91	89	93	91	89	88	85
10	103	102	100	98	102	100	99	98	99	98	97	96	97	96	95	94	91

光度値(cd/1000lm)		
	A	B
0	378	378
10	369	368
20	345	342
30	306	302
40	255	253
50	199	200
60	140	144
70	81	88
80	27	36
90	3	5
100	3	3
110	3	3
120	4	4
130	4	4
140	4	4
150	5	5
160	5	5
170	5	5
180	6	6

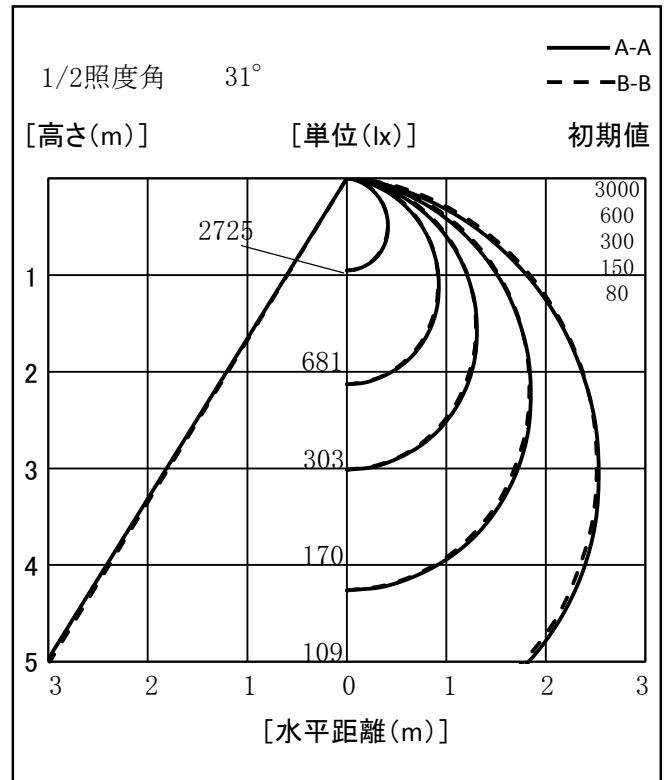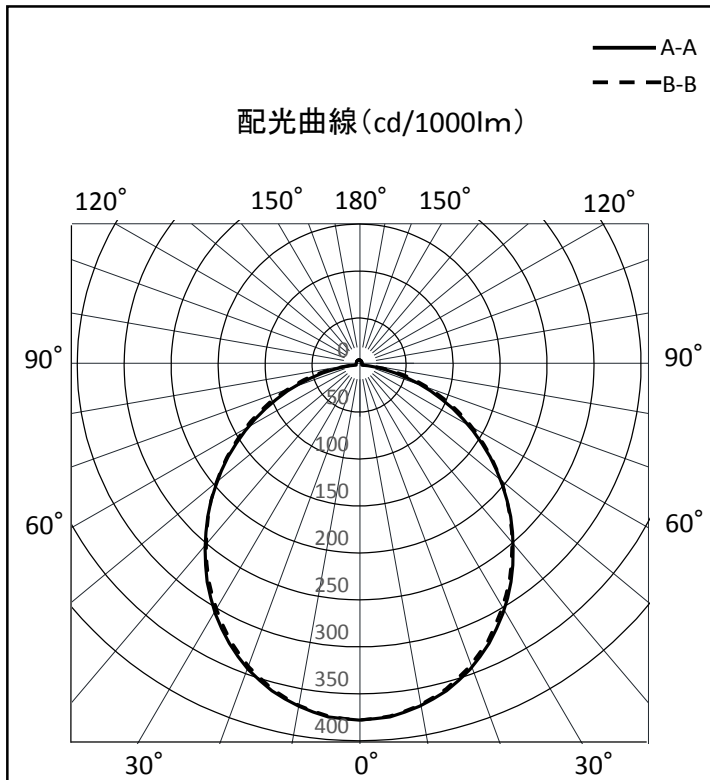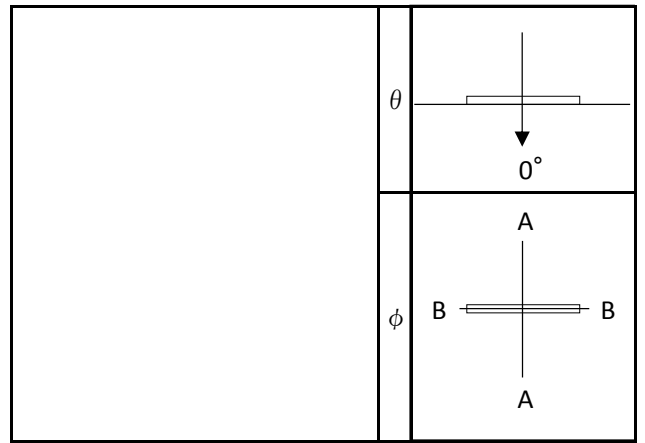

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2017/06/20