

照明器具配光データシート

名称	ベースライト
型式	BSL-W43L-50K

光源データ	
光源	LED
光束	7020 lm
色温度	5000 K
1/2 ビーム角	A-A 120° B-B 110°
1/10 ビーム角	A-A 194° B-B 160°

灯具仕様			
定格電圧	100V/200V	定格電流	0.45A/0.23A
消費電力	44W/44W		
固有エネルギー消費効率	159.5lm/W , 159.5lm/W		




最大取付間隔	
A-A	1.27 H
B-B	1.23 H

備考	

※ A:上下 B:左右

反射率	天井				壁				50				30				0
	80	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	
天井	80	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
床	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	0
室指数	照明率(×0.01)																
0.6	53	41	34	29	52	41	34	29	49	40	33	29	47	39	33	28	27
0.8	61	50	42	37	60	49	42	37	57	48	41	36	55	47	41	36	34
1	68	57	49	44	66	56	49	44	63	55	48	43	61	53	47	43	41
1.25	73	64	56	51	72	63	56	50	69	61	55	50	66	59	54	50	47
1.5	77	68	62	56	76	67	61	56	73	66	60	55	70	64	59	55	52
2	83	76	70	65	81	75	69	64	78	73	68	63	76	71	66	63	60
2.5	87	80	75	70	85	79	74	70	82	77	73	69	79	75	71	68	66
3	89	84	79	75	87	82	78	74	85	80	76	73	82	78	75	72	70
4	92	88	84	80	91	86	83	79	88	84	81	78	85	82	80	77	75
5	94	90	87	84	92	89	86	83	90	87	84	82	87	85	82	80	78
10	98	95	93	92	96	94	92	91	94	92	91	89	91	90	89	87	85

光度値(cd/1000lm)		
	A	B
0	308	308
10	303	302
20	287	283
30	262	254
40	230	217
50	193	175
60	153	128
70	111	79
80	71	32
90	42	6
100	28	5
110	20	5
120	14	6
130	12	6
140	11	7
150	10	8
160	10	8
170	9	9
180	9	9

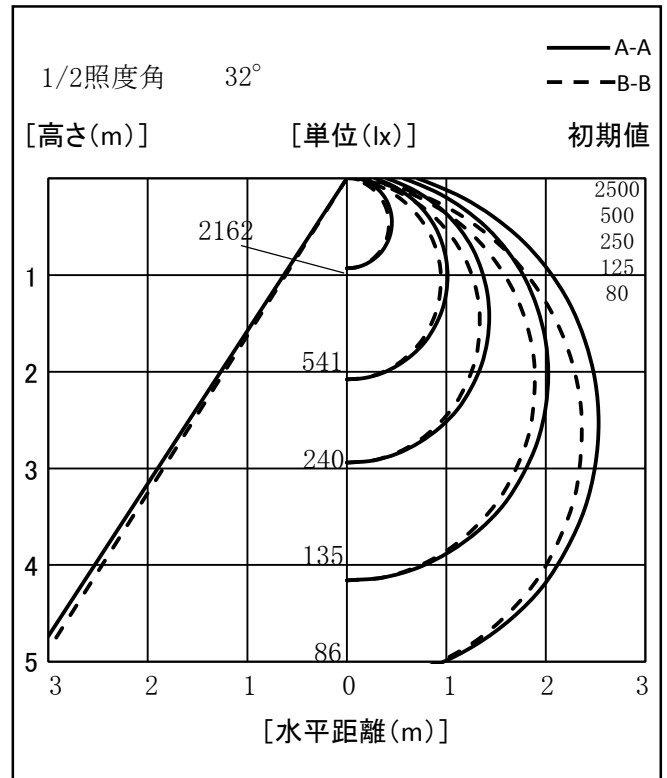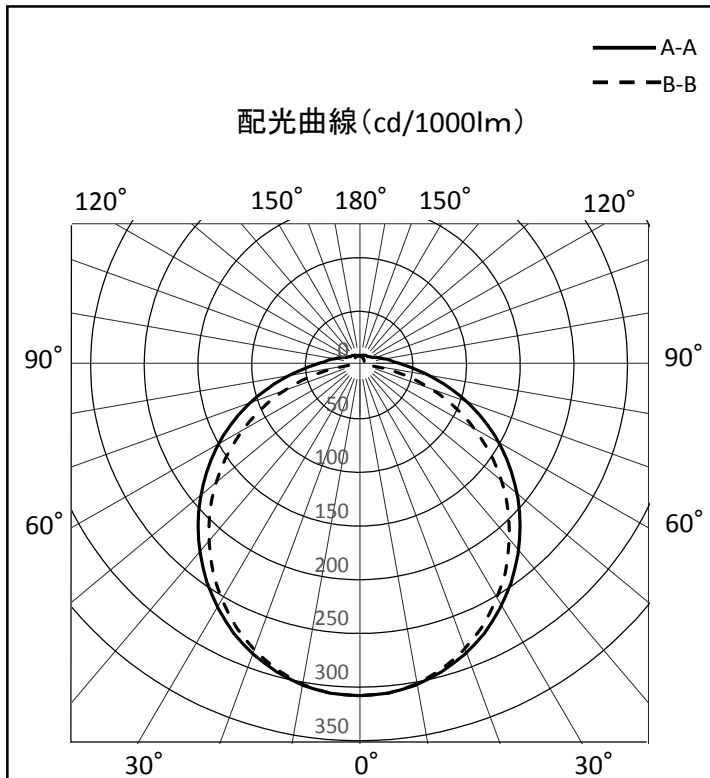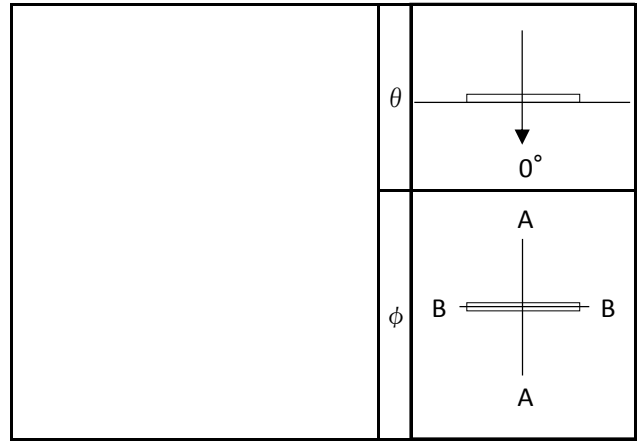

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2016/10/31