

照明器具配光データシート

名称	エースディスク
型式	L500W-P-AVS-50K-SAL

光源データ	
光源	LED
光束	70000 lm
色温度	5000 K
1/2 ビーム角	32°
1/10 ビーム角	68°

灯具仕様			
定格電圧	100V/200V	定格電流	4.9A/2.4A
消費電力	492W/476W		
固有エネルギー消費効率	142.2lm/W , 147.0lm/W		




最大取付間隔	
A-A	0.52 H
B-B	0.52 H

備考

※ A:上下 B:左右

反射率	天井	80				70				50				30				0			
	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
床	10																				
室指数	照明率(×0.01)																				
0.6	77	69	64	60	76	69	64	60	75	68	63	60	73	67	63	60	58				
0.8	84	76	71	67	82	75	70	67	80	74	70	66	79	73	69	66	65				
1	89	82	77	73	87	81	76	73	85	80	75	72	83	79	75	72	70				
1.25	93	86	82	78	91	86	81	78	89	84	80	77	87	83	79	77	75				
1.5	95	90	85	82	94	89	85	82	92	87	84	81	90	86	83	80	78				
2	100	95	91	88	98	94	91	88	96	92	89	87	94	91	88	86	84				
2.5	102	98	95	92	101	97	94	92	98	96	93	91	96	94	92	90	88				
3	104	101	98	95	102	100	97	95	100	98	96	94	98	96	94	93	90				
4	105	103	101	99	104	102	100	98	102	100	98	97	100	98	97	95	93				
5	106	104	103	101	105	103	102	100	103	101	100	99	101	99	98	97	95				
10	109	108	107	106	107	106	105	105	105	104	103	103	103	102	102	101	98				

光度値(cd/1000lm)		
	A	B
0	2134	2134
10	1590	1590
20	711	711
30	266	266
40	148	148
50	77	77
60	36	36
70	19	19
80	15	15
90	14	14
100	0	0
110	0	0
120	0	0
130	0	0
140	0	0
150	0	0
160	0	0
170	0	0
180	0	0

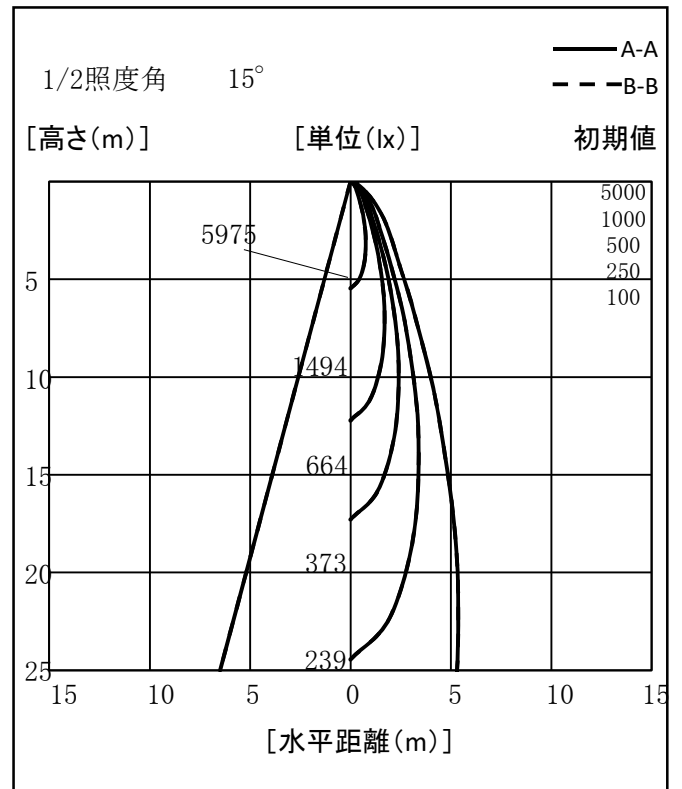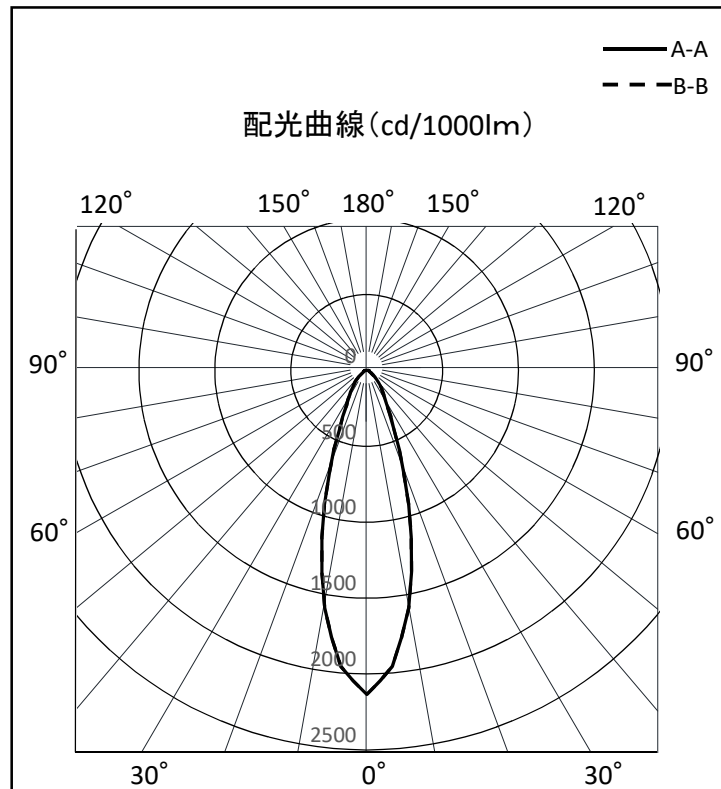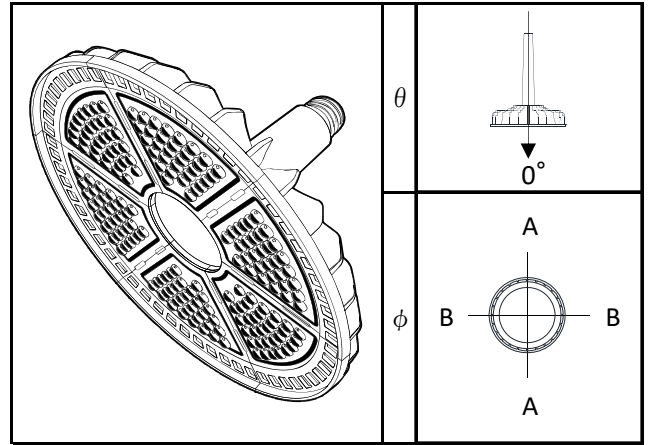

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2017/05/31

