

照明器具配光データシート

名称	LEDエアライト420
型式	LAR420-AKS-50K

光源データ	
光源	LED
光束	61000 lm
色温度	5000 K
1/2 ビーム角	A-A 130° B-B 114°
1/10 ビーム角	145°

灯具仕様			
定格電圧	100V/200V	定格電流	4.23/1.98A
消費電力	410/393W		
固有エネルギー消費効率	148.7Lm/W , 155.2Lm/W		




最大取付間隔	
A-A	2.73 H
B-B	1.28 H

備考	

※ A:上下 B:左右

反射率	照明率(×0.01)																		
	天井				壁				50				30				0		
80	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0		
70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0	0		
60	40	20	10	60	40	20	10	60	40	20	10	60	40	20	10	0	0		
50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0	0	0		
40	20	10	0	40	20	10	0	40	20	10	0	40	20	10	0	0	0		
30	10	0	0	30	10	0	0	30	10	0	0	30	10	0	0	0	0		
20	0	0	0	20	0	0	0	20	0	0	0	20	0	0	0	0	0		
10	0	0	0	10	0	0	0	10	0	0	0	10	0	0	0	0	0		
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

光度値(cd/1000lm)		
	A	B
0	247	247
10	159	240
20	83	229
30	92	213
40	106	189
50	87	159
60	61	107
70	34	40
80	13	9
90	0	0
100	0	0
110	0	0
120	0	0
130	0	0
140	0	0
150	0	0
160	0	0
170	0	0
180	0	0

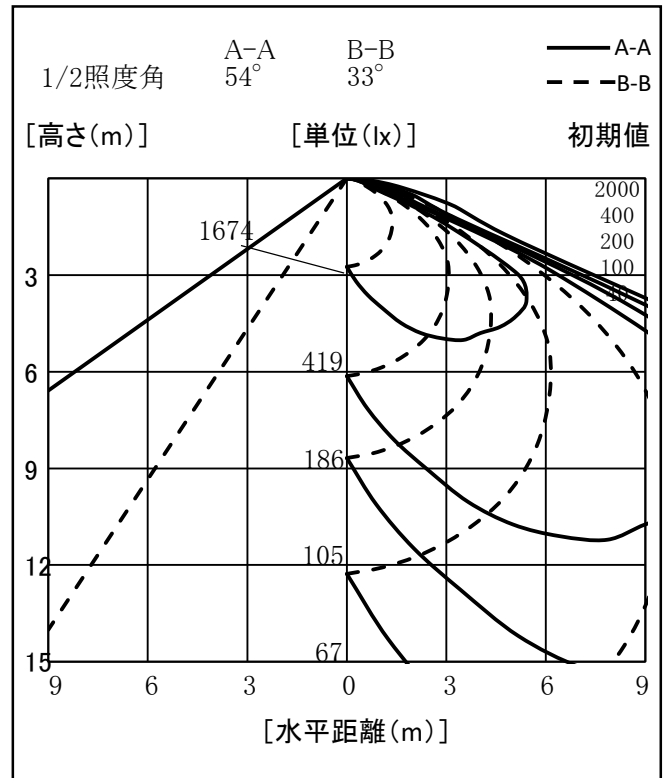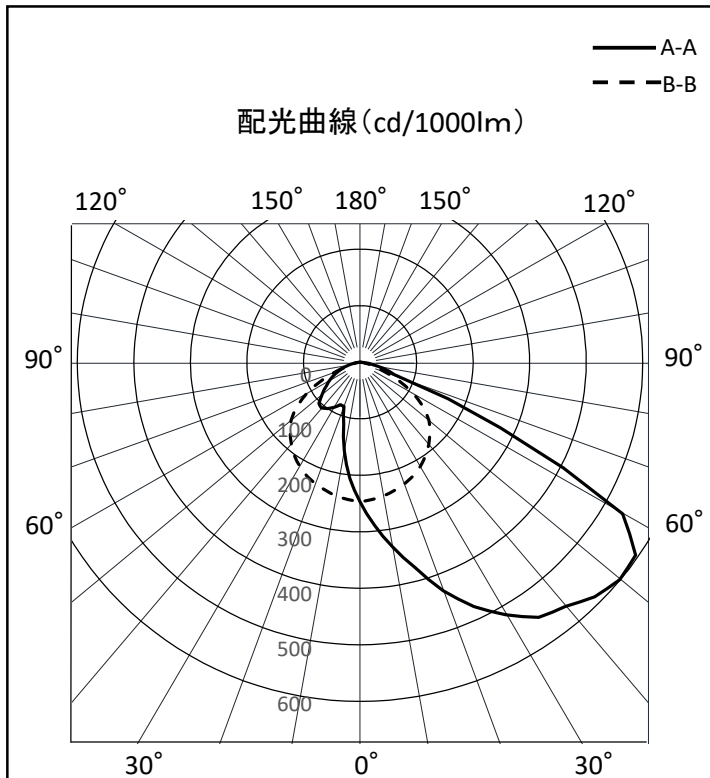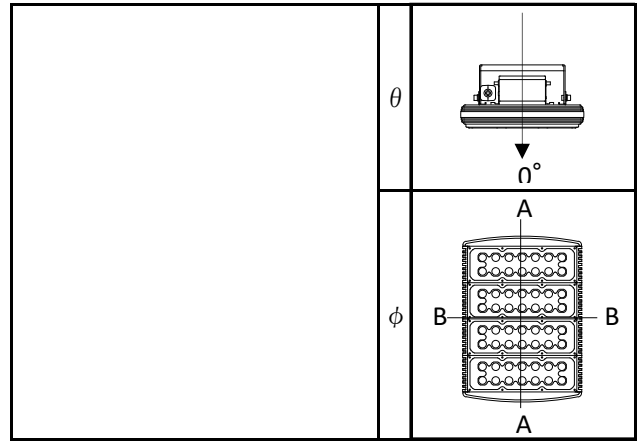

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2020/08/25