

照明器具配光データシート

名称	フラットライト
型式	LJS-FH10D-BK-25K

光源データ	
光源	LED
光束	1120 lm
色温度	2500 K
1/2 ビーム角	A-A 104° B-B 86°
1/10 ビーム角	A-A 138° B-B 122°

灯具仕様			
定格電圧	100V/200V	定格電流	0.10A/0.06A
消費電力	10.0W/10.3W		
固有エネルギー消費効率	112.0Lm/W, 108.7Lm/W		




最大取付間隔	
A-A	1.28 H
B-B	1.23 H

備考	

※ A:上下 B:左右

反射率	天井				壁				50				30				0
	80	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	
天井	80	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
床	10				10				10				10				0
室指数	照明率(×0.01)																
0.6	63	52	46	41	62	52	46	41	60	51	45	41	58	50	45	41	39
0.8	72	62	56	51	71	62	56	51	68	61	55	51	66	59	54	50	49
1	79	70	64	59	77	69	64	59	75	68	63	59	73	67	62	58	57
1.25	84	77	71	67	83	76	71	67	81	75	70	66	78	73	69	66	64
1.5	88	82	77	73	87	81	76	72	84	79	75	72	82	78	74	71	69
2	94	89	84	81	92	88	84	81	90	86	83	80	88	84	81	79	77
2.5	97	93	89	86	95	92	88	86	93	90	87	85	91	88	86	84	82
3	99	95	92	90	97	94	92	89	95	92	90	88	93	91	89	87	85
4	101	98	96	94	100	97	95	93	97	95	94	92	95	93	92	91	88
5	102	100	98	96	101	99	97	95	98	97	95	94	96	95	94	93	90
10	104	103	102	101	103	102	101	100	101	100	99	98	99	98	97	97	94

光度値(cd/1000lm)		
	A	B
0	455	455
10	448	447
20	426	421
30	391	386
40	343	269
50	251	144
60	137	47
70	32	24
80	9	7
90	4	4
100	5	4
110	5	5
120	6	6
130	6	6
140	7	7
150	7	7
160	8	8
170	9	8
180	9	9

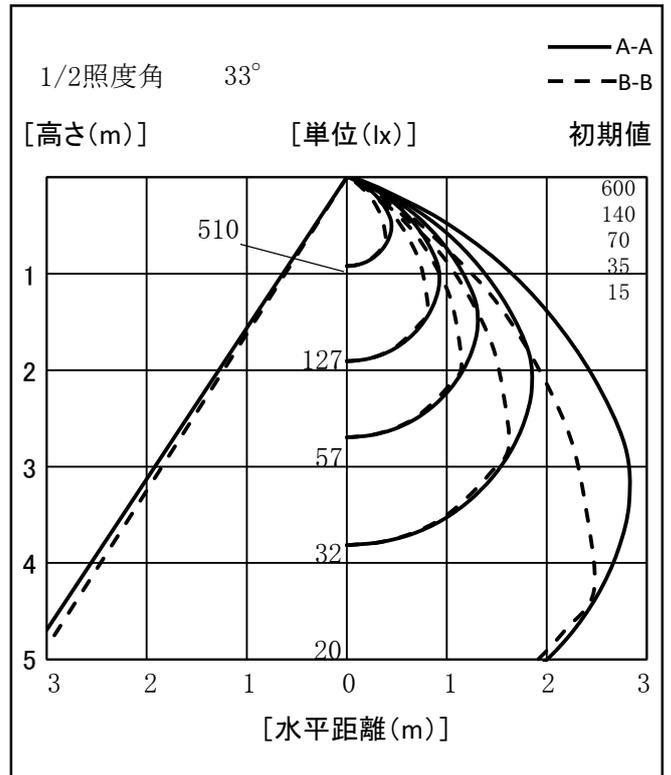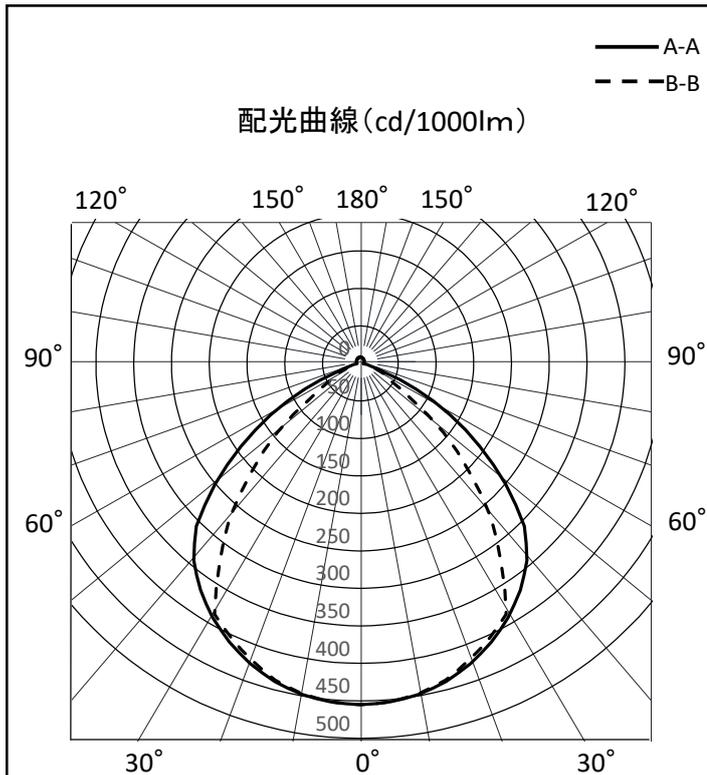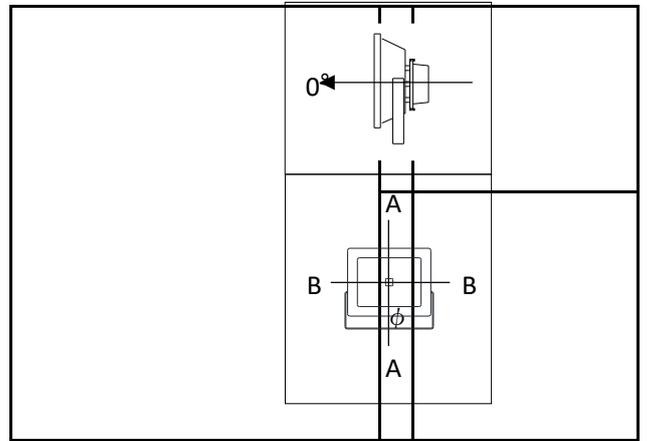

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2022/10/27