

# 照明器具配光データシート

名称	フラットライト
型式	LJS-FH20D-BK-50K

光源データ	
光源	LED
光束	3270 lm
色温度	5000 K
1/2 ビーム角	106°
1/10 ビーム角	140°

灯具仕様			
定格電圧	100V/200V	定格電流	0.22/0.12A
消費電力	23/23W		
固有エネルギー消費効率	142.1 lm/W , 142.1 lm/W		




最大取付間隔	
A-A	1.29 H
B-B	1.29 H

備考	

※ A:上下 B:左右

反射率	天井				壁				床				室指数	照明率(×0.01)																												
	80	70	50	30	10	70	50	30	10	70	50	30		10	70	50	30	10	70	50	30	0	0	0	0	0	0	0	0													
天井	80	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	0	0	0	0	0.6	61	49	42	37	59	49	42	37	57	48	42	37	55	47	41	37	35
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0.8	70	60	53	47	69	59	52	47	66	58	52	47	64	56	51	47	45
床	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	1	77	67	61	56	75	67	60	55	73	65	60	55	70	64	59	55	53
																									1.25	83	75	68	63	81	74	68	63	79	72	67	63	76	71	66	62	60
													1.5	87	80	74	69	85	79	73	69	83	77	72	68	80	75	71	68	66												
													2	93	87	82	78	91	86	81	78	88	84	80	77	86	82	79	76	74												
													2.5	96	91	87	83	94	90	86	83	92	88	85	82	89	86	83	81	79												
													3	98	94	90	87	97	93	90	87	94	91	88	86	92	89	87	85	82												
													4	100	97	94	92	99	96	93	91	96	94	92	90	94	92	90	88	86												
													5	102	99	97	94	100	98	96	94	98	96	94	92	96	94	92	91	88												
													10	104	103	101	100	103	102	100	99	101	99	98	97	98	97	96	96	93												

光度値(cd/1000lm)		
	A	B
0	400	400
10	395	395
20	379	379
30	349	349
40	304	304
50	231	231
60	112	112
70	40	40
80	11	11
90	2	2
100	1	1
110	2	2
120	2	2
130	3	3
140	3	3
150	4	4
160	4	4
170	5	5
180	5	5

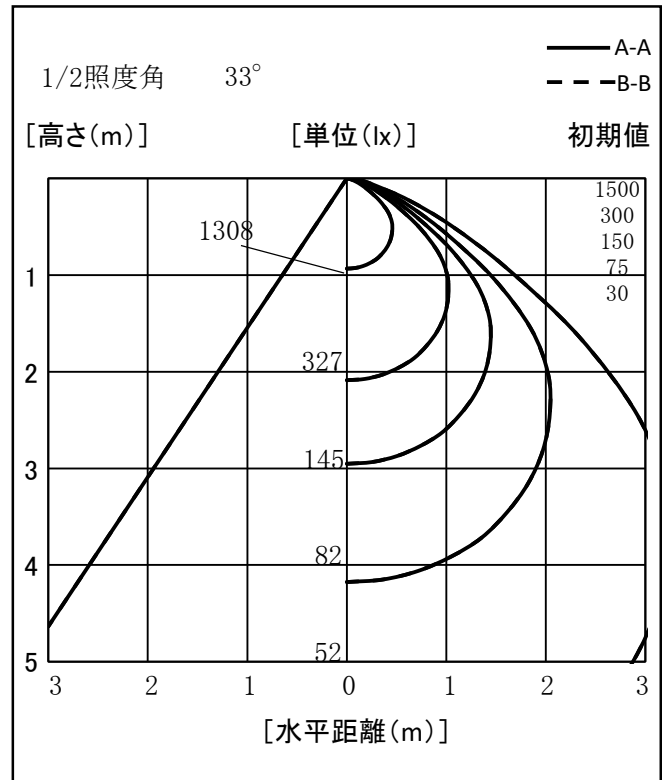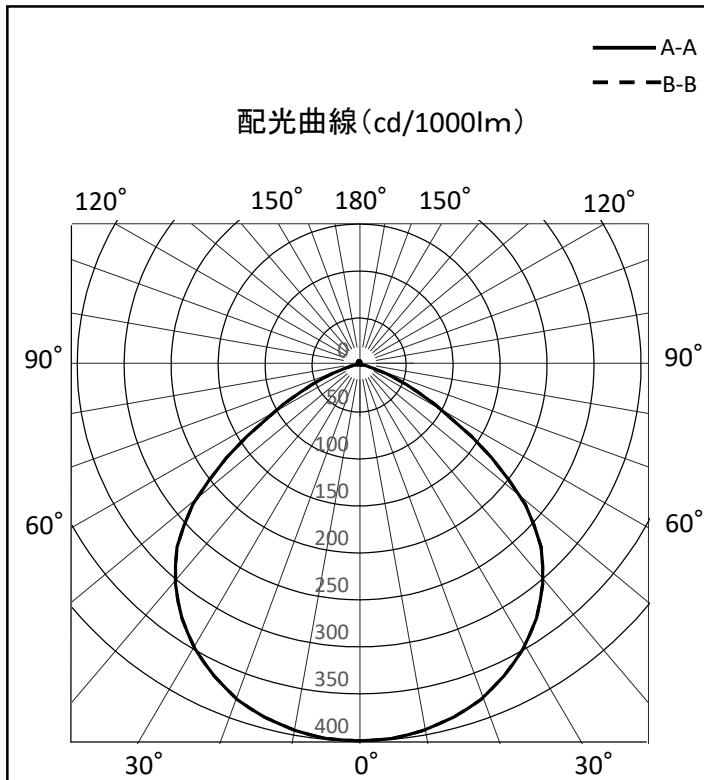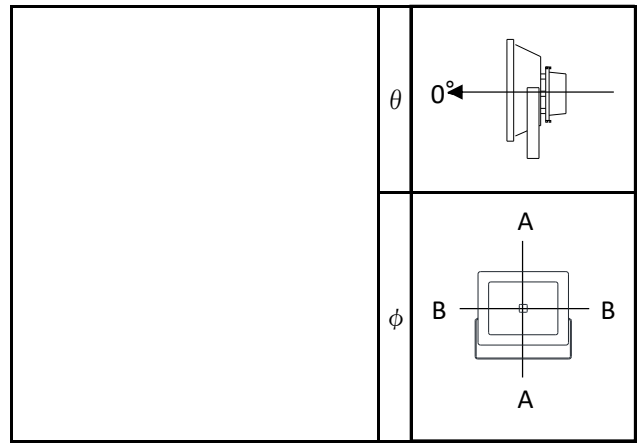

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2020/07/21