

照明器具配光データシート

名称	ハイディスク 電源内蔵型 200W
型式	L200B-P-HM110-50K

光源データ	
光源	LED
光束	33100 lm
色温度	5000 K
1/2 ビーム角	112°
1/10 ビーム角	188°


灯具仕様			
定格電圧	100V/200V	定格電流	1.99A / 0.98A
消費電力	195W / 192W		
固有エネルギー消費効率	169.7 Lm/W , 172.3 Lm/W		

最大取付間隔	
A-A	1.24 H
B-B	1.24 H



備考	

※ A:上下 B:左右

反射率	照明率(×0.01)																							
	天井				壁				50				30				0							
天井	80																							
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0	0	0	0
床	10																							
室指数	照明率(×0.01)																							
0.6	53	41	34	28	52	41	34	28	50	40	33	28	47	39	33	28	26	26	26	26	26	26	26	26
0.8	61	50	42	36	60	49	42	36	57	48	41	36	55	47	40	36	34	34	34	34	34	34	34	34
1	68	57	49	43	66	56	48	43	63	54	48	42	60	53	47	42	40	40	40	40	40	40	40	40
1.25	73	63	56	50	72	62	55	49	69	60	54	49	66	59	53	49	46	46	46	46	46	46	46	46
1.5	77	68	61	55	76	67	60	55	72	65	59	54	70	63	58	54	51	51	51	51	51	51	51	51
2	83	75	69	63	81	74	68	63	78	72	67	62	75	70	66	62	59	59	59	59	59	59	59	59
2.5	87	80	74	69	85	79	73	69	82	77	72	68	79	74	71	67	64	64	64	64	64	64	64	64
3	89	83	78	73	87	82	77	73	84	80	76	72	82	78	74	71	68	68	68	68	68	68	68	68
4	92	87	83	79	91	86	82	78	88	84	80	77	85	82	79	76	73	73	73	73	73	73	73	73
5	94	90	86	83	93	89	85	82	90	86	83	81	87	84	82	79	77	77	77	77	77	77	77	77
10	98	96	93	91	97	94	92	90	94	92	90	89	92	90	88	87	84	84	84	84	84	84	84	84

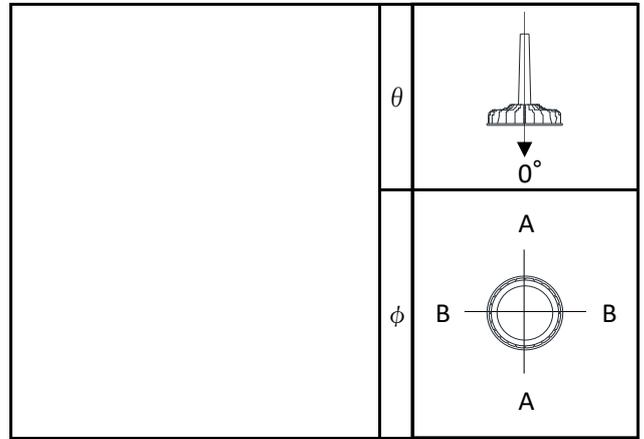

光度値(cd/1000lm)	A		B	
	A	B	A	B
0	305	305	305	305
10	299	299	299	299
20	282	282	282	282
30	254	254	254	254
40	219	219	219	219
50	179	179	179	179
60	137	137	137	137
70	96	96	96	96
80	62	62	62	62
90	37	37	37	37
100	20	20	20	20
110	11	11	11	11
120	6	6	6	6
130	5	5	5	5
140	5	5	5	5
150	5	5	5	5
160	5	5	5	5
170	5	5	5	5
180	5	5	5	5

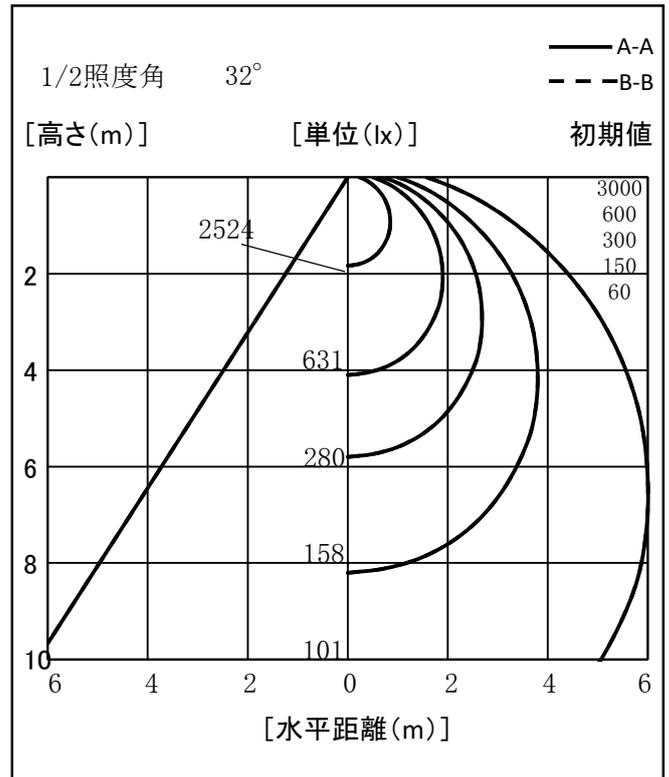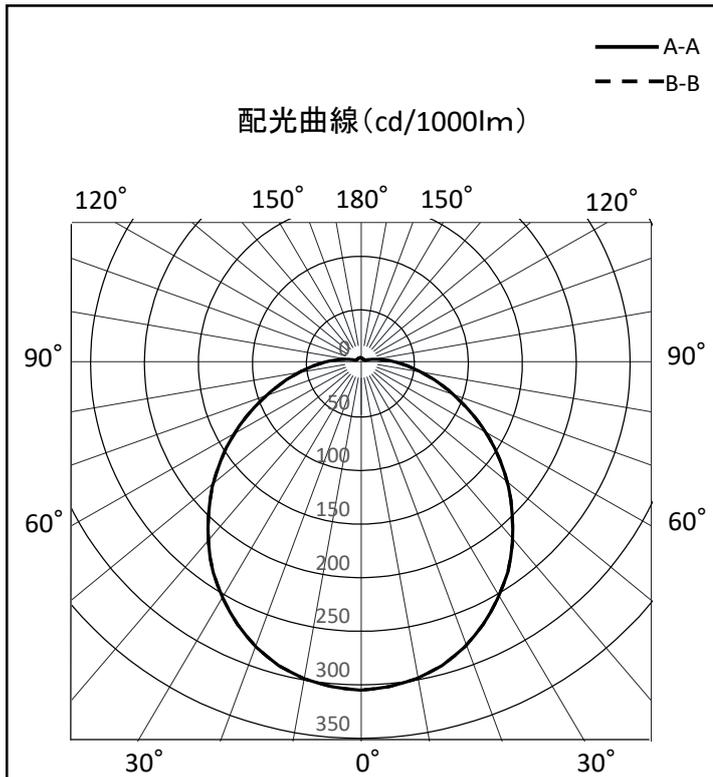

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2017/09/29