

照明器具配光データシート

名称	ハイスペックエコビック20W
型式	L20W-JW110-50K

光源データ	
光源	LED
光束	2780 lm
色温度	5000 K
1/2 ビーム角	112°
1/10 ビーム角	168°

灯具仕様			
定格電圧	100V/200V	定格電流	0.22/0.12A
消費電力	21/22W		
固有エネルギー消費効率	132.3Lm/W , 126.3Lm/W		



最大取付間隔	
A-A	1.26 H
B-B	1.26 H

備考	

※ A:上下 B:左右

反射率	天井				70				50				30				0
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
床	10				10				10				10				0
室指数	照明率(×0.01)																
0.6	54	43	35	30	53	42	35	30	51	41	35	30	49	40	34	30	28
0.8	63	52	44	39	61	51	44	38	59	50	43	38	56	48	42	38	36
1	69	59	51	46	67	58	51	45	65	56	50	45	62	55	49	45	43
1.25	75	65	58	53	73	64	58	52	70	63	57	52	67	61	56	51	49
1.5	79	70	63	58	77	69	63	58	74	67	62	57	71	65	61	57	54
2	84	77	71	66	83	76	71	66	80	74	69	65	77	72	68	65	62
2.5	88	82	77	72	86	81	76	72	83	79	74	71	81	77	73	70	68
3	90	85	80	76	89	84	79	76	86	82	78	75	83	80	77	74	71
4	93	89	85	82	92	88	84	81	89	85	82	80	86	83	81	79	76
5	95	91	88	85	93	90	87	84	91	88	85	83	88	86	84	82	79
10	98	96	94	92	97	95	93	92	94	93	91	90	92	91	89	88	85

光度値(cd/1000lm)		
	A	B
0	322	322
10	317	317
20	301	301
30	274	274
40	237	237
50	191	191
60	136	136
70	82	82
80	43	43
90	23	23
100	13	13
110	8	8
120	5	5
130	5	5
140	4	4
150	4	4
160	4	4
170	4	4
180	4	4

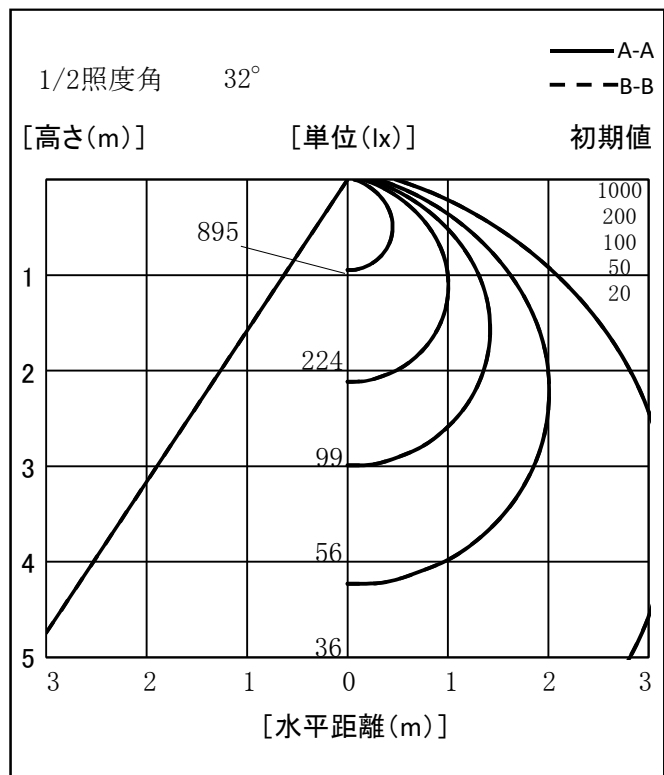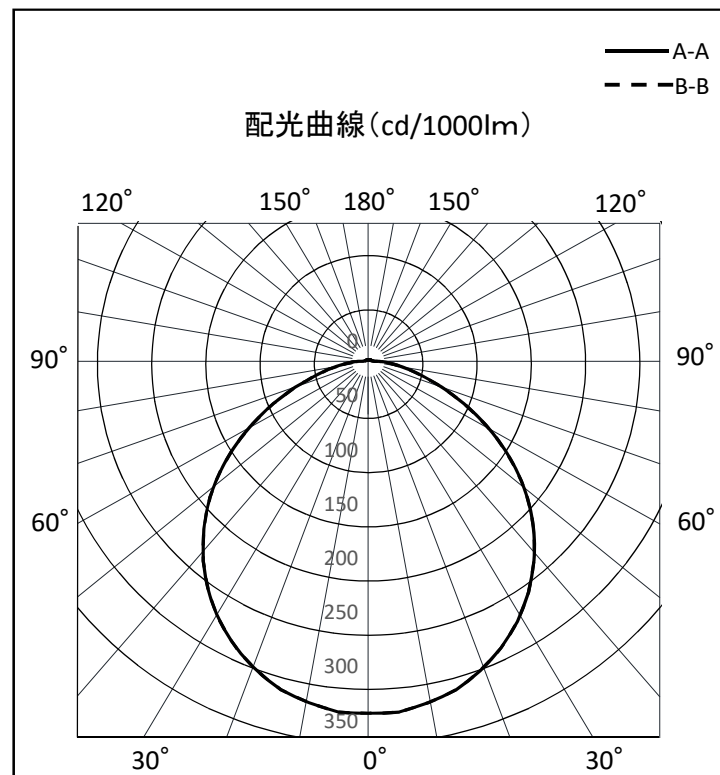

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2018/10/16