

照明器具配光データシート

名称	エースディスク
型式	L300W-E39-AVS-50K / L300W-P-AVS-50K

光源データ	
光源	LED
光束	36000 lm
色温度	5000 K
1/2 ビーム角	30°
1/10 ビーム角	62°

灯具仕様			
定格電圧	100V/200V	定格電流	3.0A/1.5A
消費電力	305W/295W		
固有エネルギー消費効率	118lm/W , 122lm/W		



最大取付間隔	
A-A	0.49 H
B-B	0.49 H

備考	

※ A:上下 B:左右

反射率	天井				壁				床				照明率(×0.01)				
	80	70	50	30	80	70	50	30	80	70	50	30	0.6	0.8	1	1.25	
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
	10				10				10				10				0
室指数	64	57	53	50	64	57	53	50	62	56	53	50	61	56	52	50	49
	70	63	59	56	69	63	59	56	67	62	58	55	66	61	58	55	54
	74	68	64	61	73	67	64	61	71	66	63	60	69	65	62	60	59
	77	72	68	65	76	71	68	65	74	70	67	64	73	69	66	64	63
	80	75	71	68	79	74	71	68	77	73	70	68	75	72	69	67	66
	83	79	76	74	82	79	76	73	80	77	75	73	78	76	74	72	70
	85	82	79	77	84	81	79	77	82	80	78	76	80	78	77	75	73
	87	84	82	80	86	83	81	79	84	82	80	78	82	80	79	77	76
	88	86	84	83	87	85	84	82	85	84	82	81	83	82	81	80	78
	89	87	86	84	88	86	85	84	86	85	84	82	84	83	82	81	79
	91	90	89	88	90	89	88	87	88	87	87	86	86	85	85	84	82

光度値(cd/1000lm)		
	A	B
0	1955	1955
10	1431	1431
20	557	557
30	209	209
40	123	123
50	65	65
60	32	32
70	18	18
80	16	16
90	0	0
100	0	0
110	0	0
120	0	0
130	0	0
140	0	0
150	0	0
160	0	0
170	0	0
180	0	0

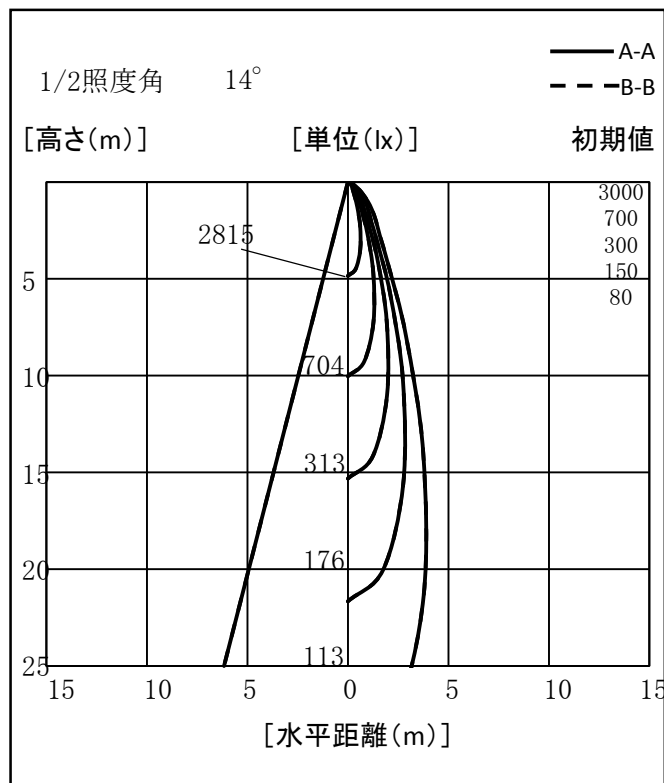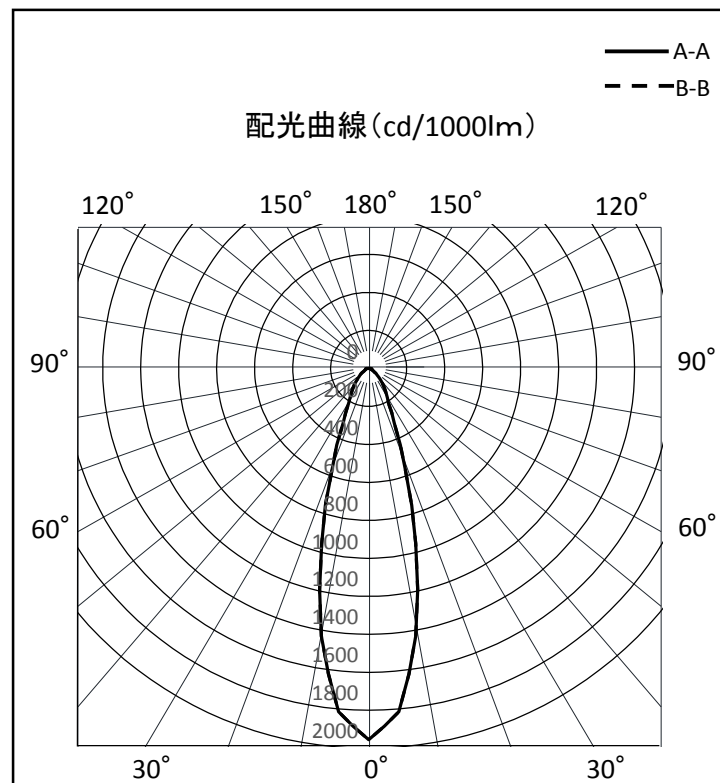

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2014/09/10