

照明器具配光データシート

名称	エコビック50W
型式	L50V2-J50BK-50K

光源データ	
光源	LED
光束	6490 lm
色温度	5000 K
1/2 ビーム角	46°
1/10 ビーム角	106°

灯具仕様			
定格電圧	100V/200V	定格電流	0.52/0.27A
消費電力	52/51.3W		
固有エネルギー消費効率	124.8Lm/W , 126.5Lm/W		




最大取付間隔	
A-A	0.72 H
B-B	0.72 H

備考	

※ A:上下 B:左右

反射率	天井				壁				床				室指数	照明率(×0.01)																				
	80	70	50	30	80	70	50	30	80	70	50	30		0	70		50		30		10		0											
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0	70	50	30	10	70	50	30	10	0	70	50	30	10				
	10				10				10				10					69	61	55	51	68	60	55	51	67	59	54	51	65	58	54	51	49
	77	68	63	58	75	68	62	58	73	67	62	58	71	66	61	58	56	77	68	63	58	75	68	62	58	73	67	62	58	71	66	61	58	56
	82	74	69	65	81	74	69	65	79	73	68	64	77	71	67	64	62	82	74	69	65	81	74	69	65	79	73	68	64	77	71	67	64	62
	87	80	75	71	85	79	74	71	83	78	74	70	81	76	73	70	68	87	80	75	71	85	79	74	71	83	78	74	70	81	76	73	70	68
	90	84	79	75	89	83	79	75	86	81	78	74	84	80	77	74	72	90	84	79	75	89	83	79	75	86	81	78	74	84	80	77	74	72
	94	90	86	83	93	89	85	82	91	87	84	81	89	86	83	81	79	94	90	86	83	93	89	85	82	91	87	84	81	89	86	83	81	79
	97	93	90	87	96	92	89	87	94	91	88	86	91	89	87	85	83	97	93	90	87	96	92	89	87	94	91	88	86	91	89	87	85	83
	99	96	93	91	98	95	92	90	95	93	91	89	93	91	89	88	86	99	96	93	91	98	95	92	90	95	93	91	89	88	86	86	86	86
	101	98	96	94	100	98	95	94	98	96	94	92	95	94	92	91	89	101	98	96	94	100	98	95	94	98	96	94	92	91	89	89	89	89
	102	100	98	97	101	99	97	96	99	97	96	94	97	95	94	93	91	102	100	98	97	101	99	97	96	99	97	96	94	93	91	91	91	91
	104	103	102	102	103	102	101	101	101	100	100	99	99	98	98	97	95	104	103	102	102	103	102	101	101	100	99	99	98	98	97	97	95	95

光度値(cd/1000lm)		
	A	B
0	1032	1032
10	907	907
20	612	612
30	345	345
40	198	198
50	119	119
60	71	71
70	35	35
80	14	14
90	4	4
100	4	4
110	4	4
120	4	4
130	5	5
140	5	5
150	6	6
160	7	7
170	8	8
180	8	8

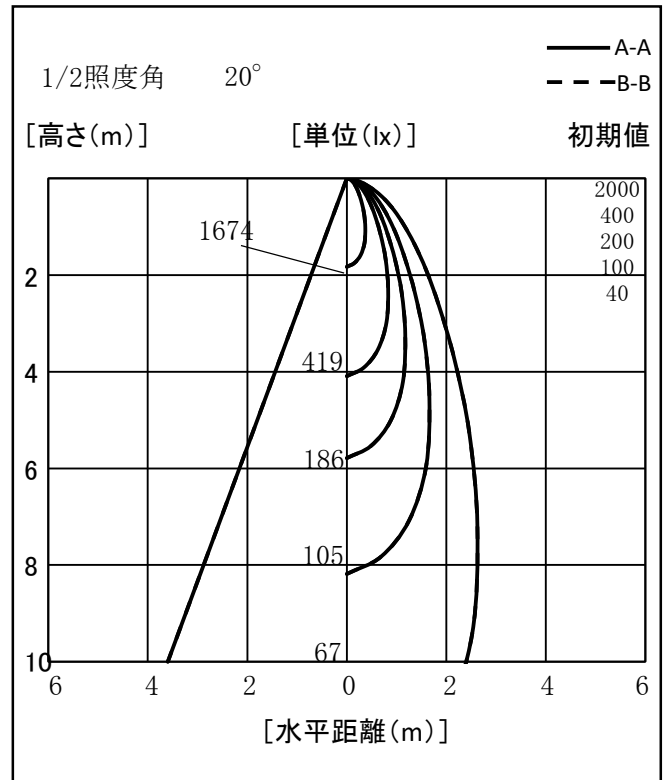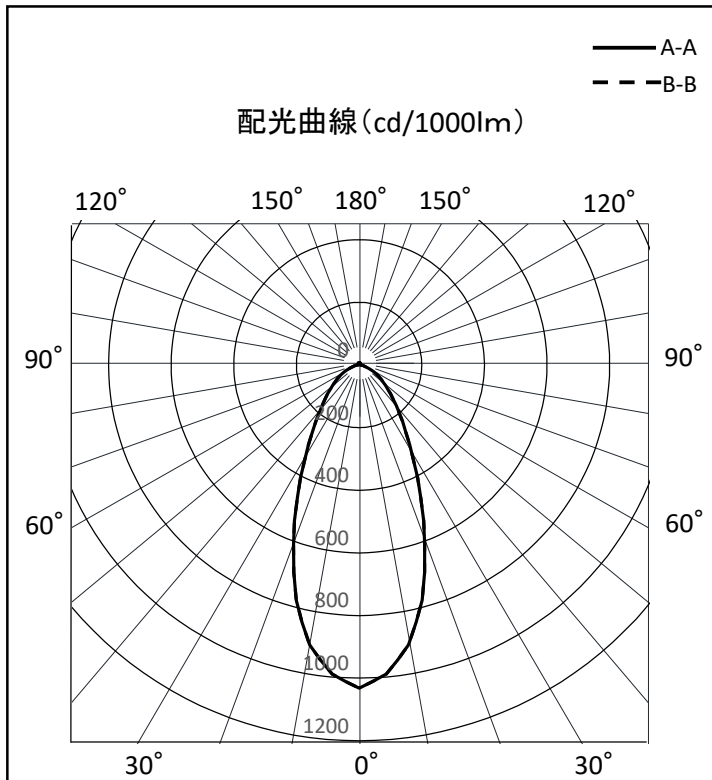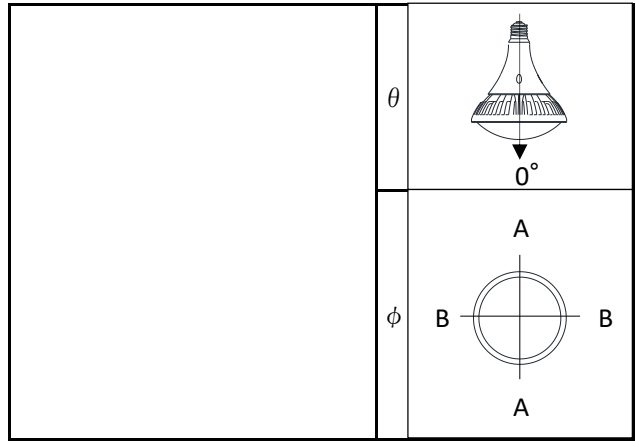

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2020/04/15