

# 照明器具配光データシート

名称	エコビック
型式	L50W-E39-WW-50K-N

光源データ	
光源	LED
光束	7540 lm
色温度	5000 K
1/2 ビーム角	112°
1/10 ビーム角	182°

灯具仕様			
定格電圧	100V/200V	定格電流	0.5A / 0.29A
消費電力	50W / 50W		
固有エネルギー消費効率	150.8Lm/W		



最大取付間隔	
A-A	1.24 H
B-B	1.24 H

備考	

※ A:上下 B:左右

反射率	天井				壁				床				照明率(×0.01)				
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	
0.6	57	44	36	31	56	44	36	31	53	43	36	30	51	42	35	30	28
0.8	66	54	45	39	65	53	45	39	62	51	44	39	59	50	43	38	36
1	73	61	53	46	71	60	52	46	68	58	51	46	65	57	50	45	43
1.25	79	68	60	53	77	67	59	53	74	65	58	53	71	63	57	52	50
1.5	83	73	65	59	81	72	65	59	78	70	63	58	75	68	62	58	55
2	89	81	74	68	88	80	73	68	84	77	72	67	81	75	70	66	63
2.5	93	86	80	74	91	85	79	74	88	82	77	73	85	80	76	72	69
3	96	89	84	79	94	88	83	78	91	86	81	77	88	83	80	76	73
4	99	94	89	85	97	93	88	84	94	90	86	83	91	88	85	82	79
5	101	97	92	89	100	95	91	88	96	93	90	87	94	91	88	85	82
10	106	103	100	98	104	102	99	97	101	99	97	95	99	97	95	93	90

光度値(cd/1000lm)	A		B	
	0	10	20	30
0	328	328	328	328
10	322	322	322	322
20	303	303	303	303
30	273	273	273	273
40	235	235	235	235
50	191	191	191	191
60	145	145	145	145
70	104	104	104	104
80	69	69	69	69
90	43	43	43	43
100	0	0	0	0
110	0	0	0	0
120	0	0	0	0
130	0	0	0	0
140	0	0	0	0
150	0	0	0	0
160	0	0	0	0
170	0	0	0	0
180	0	0	0	0

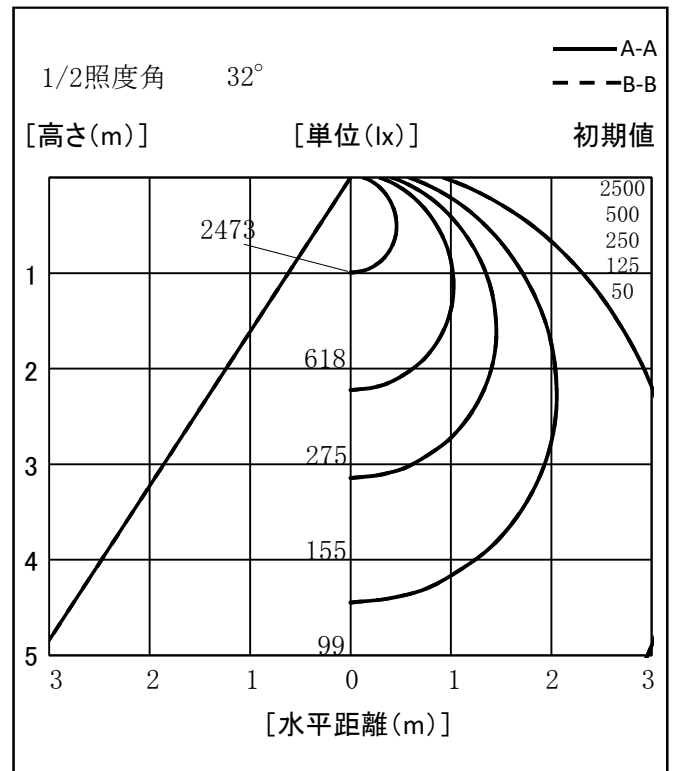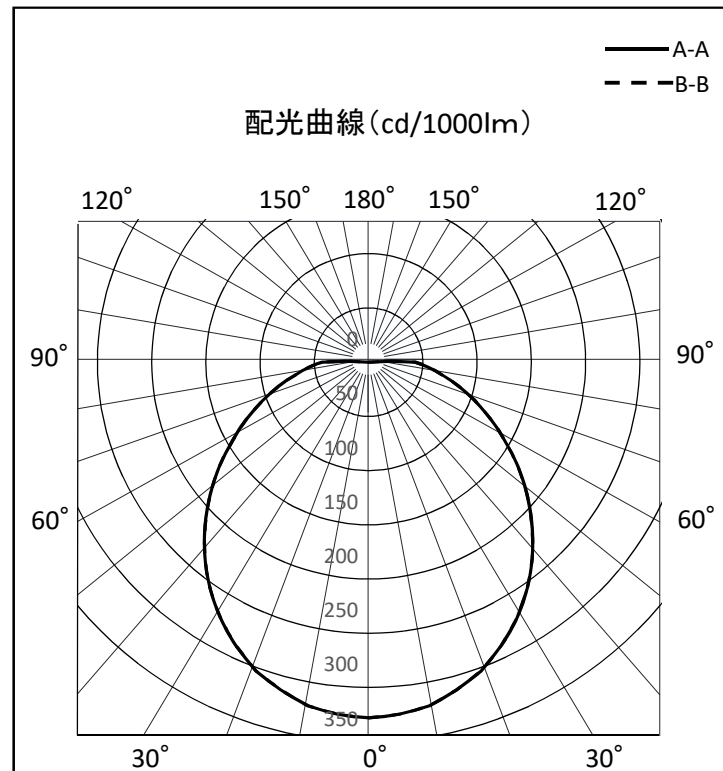

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2017/11/6