

照明器具配光データシート

名称	カラーエコナイター
型式	LEN-30D-DB-G

光源データ	
光源	LED
光束	2000 lm
色温度	-
1/2 ビーム角	A-A 120° B-B 110°
1/10 ビーム角	142°

灯具仕様			
定格電圧	100V	定格電流	0.36A
消費電力	32W		
固有エネルギー消費効率	62.5lm/W		




最大取付間隔	
A-A	1.19 H
B-B	1.26 H

備考	

※ A:上下 B:左右

反射率	照度値 (lx)																
	80				70				50				30				0
天井	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0
床	10				10				10				10				0
室指数	照明率(×0.01)																
0.6	45	36	30	26	44	36	30	26	42	35	30	26	41	34	29	26	25
0.8	53	44	38	34	52	44	38	34	50	43	38	34	48	42	37	34	32
1	58	50	45	41	57	50	45	40	55	49	44	40	53	47	43	40	38
1.25	63	56	51	47	62	55	51	47	60	54	50	46	58	53	49	46	44
1.5	66	60	56	52	65	60	55	52	63	58	54	51	61	57	53	51	49
2	71	66	62	59	70	65	62	59	68	64	61	58	66	63	60	57	56
2.5	74	70	67	64	73	69	66	63	71	68	65	63	69	66	64	62	60
3	76	72	69	67	75	71	69	66	73	70	68	66	71	68	67	65	63
4	78	75	73	71	77	74	72	70	75	73	71	69	73	71	70	68	66
5	79	77	75	73	78	76	74	73	76	74	73	71	74	73	72	70	68
10	81	80	79	78	80	79	78	77	78	78	77	76	77	76	75	75	72

光度値(cd/1000lm)		
	A	B
0	294	294
10	290	297
20	267	270
30	234	246
40	209	219
50	191	174
60	153	123
70	10	59
80	1	2
90	0	0
100	0	0
110	0	0
120	0	0
130	0	0
140	0	0
150	0	0
160	0	0
170	0	0
180	0	0

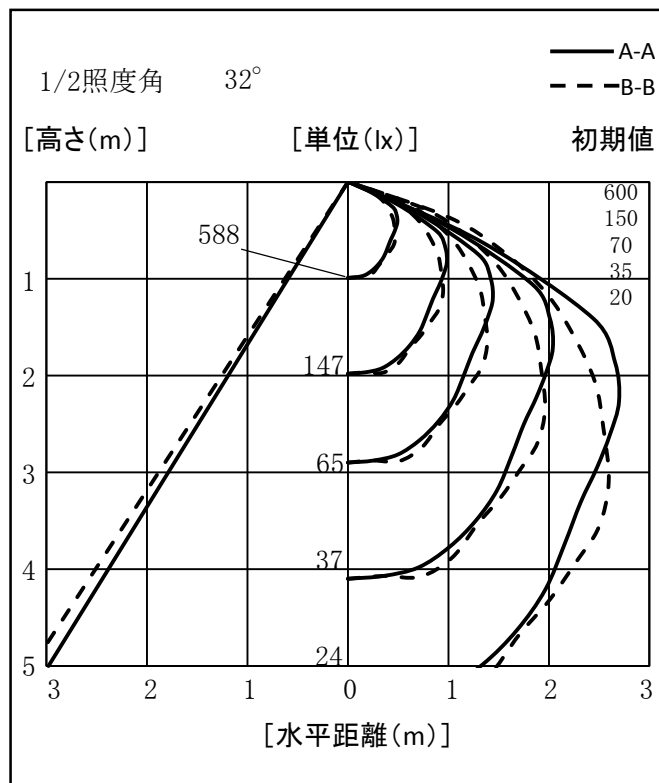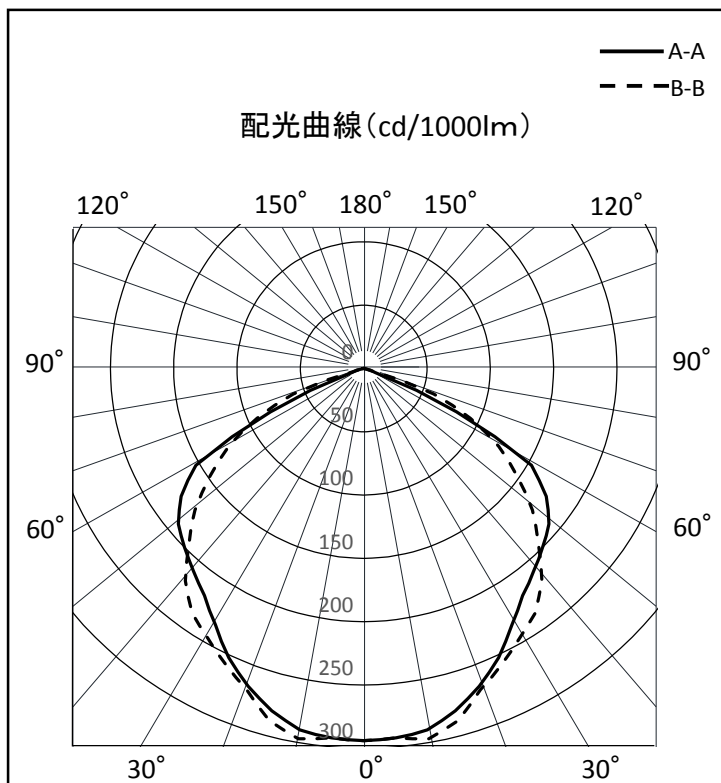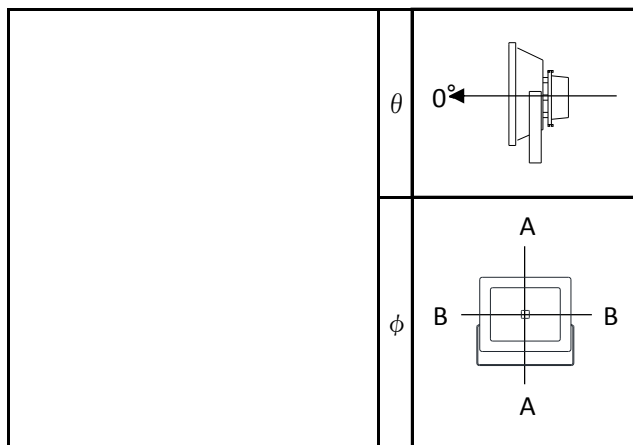

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2014/09/24