

# 照明器具配光データシート

|    |              |
|----|--------------|
| 名称 | カラーエコナイター    |
| 型式 | LEN-50D-DB-B |

| 光源データ     |        |
|-----------|--------|
| 光源        | LED    |
| 光束        | 500 lm |
| 色温度       | -      |
| 1/2 ビーム角  | 103°   |
| 1/10 ビーム角 | 137°   |

| 灯具仕様        |         |      |      |
|-------------|---------|------|------|
| 定格電圧        | 100V    | 定格電流 | 0.6A |
| 消費電力        | 56W     |      |      |
| 固有エネルギー消費効率 | 8.9lm/W |      |      |




| 最大取付間隔 |        |
|--------|--------|
| A-A    | 1.03 H |
| B-B    | 1.21 H |

| 備考 |  |
|----|--|
|    |  |

※ A:上下 B:左右

| 反射率  | 照明率(×0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|      | 天井         |    |    |    | 壁  |    |    |    | 50 |    |    |    | 30 |    |    |    | 0  |    |    |    |
| 天井   | 80         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 壁    | 70         | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 |
| 床    | 10         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 室指数  | 照明率(×0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0.6  | 41         | 33 | 28 | 25 | 40 | 33 | 28 | 25 | 39 | 32 | 28 | 25 | 37 | 31 | 27 | 25 | 23 |    |    |    |
| 0.8  | 47         | 40 | 35 | 32 | 46 | 40 | 35 | 32 | 45 | 39 | 35 | 31 | 43 | 38 | 34 | 31 | 30 |    |    |    |
| 1    | 52         | 46 | 41 | 37 | 51 | 45 | 41 | 37 | 49 | 44 | 40 | 37 | 48 | 43 | 40 | 37 | 35 |    |    |    |
| 1.25 | 56         | 51 | 46 | 43 | 55 | 50 | 46 | 43 | 54 | 49 | 45 | 42 | 52 | 48 | 45 | 42 | 41 |    |    |    |
| 1.5  | 59         | 54 | 50 | 47 | 58 | 54 | 50 | 47 | 56 | 52 | 49 | 46 | 55 | 51 | 48 | 46 | 45 |    |    |    |
| 2    | 63         | 59 | 56 | 53 | 62 | 59 | 56 | 53 | 60 | 57 | 55 | 52 | 59 | 56 | 54 | 52 | 50 |    |    |    |
| 2.5  | 66         | 62 | 60 | 57 | 65 | 62 | 59 | 57 | 63 | 60 | 58 | 56 | 61 | 59 | 57 | 56 | 54 |    |    |    |
| 3    | 67         | 64 | 62 | 60 | 66 | 64 | 62 | 60 | 64 | 62 | 60 | 59 | 63 | 61 | 60 | 58 | 57 |    |    |    |
| 4    | 69         | 67 | 65 | 63 | 68 | 66 | 64 | 63 | 66 | 65 | 63 | 62 | 65 | 63 | 62 | 61 | 59 |    |    |    |
| 5    | 70         | 68 | 67 | 65 | 69 | 67 | 66 | 65 | 67 | 66 | 65 | 64 | 66 | 65 | 64 | 63 | 61 |    |    |    |
| 10   | 72         | 71 | 70 | 69 | 71 | 70 | 69 | 68 | 69 | 68 | 68 | 67 | 68 | 67 | 67 | 66 | 64 |    |    |    |

| 光度値(cd/1000lm) |     |     |
|----------------|-----|-----|
|                | A   | B   |
| 0              | 302 | 302 |
| 10             | 277 | 297 |
| 20             | 237 | 272 |
| 30             | 207 | 244 |
| 40             | 186 | 204 |
| 50             | 156 | 163 |
| 60             | 115 | 116 |
| 70             | 3   | 20  |
| 80             | 0   | 1   |
| 90             | 0   | 0   |
| 100            | 0   | 0   |
| 110            | 0   | 0   |
| 120            | 0   | 0   |
| 130            | 0   | 0   |
| 140            | 0   | 0   |
| 150            | 0   | 0   |
| 160            | 0   | 0   |
| 170            | 0   | 0   |
| 180            | 0   | 0   |

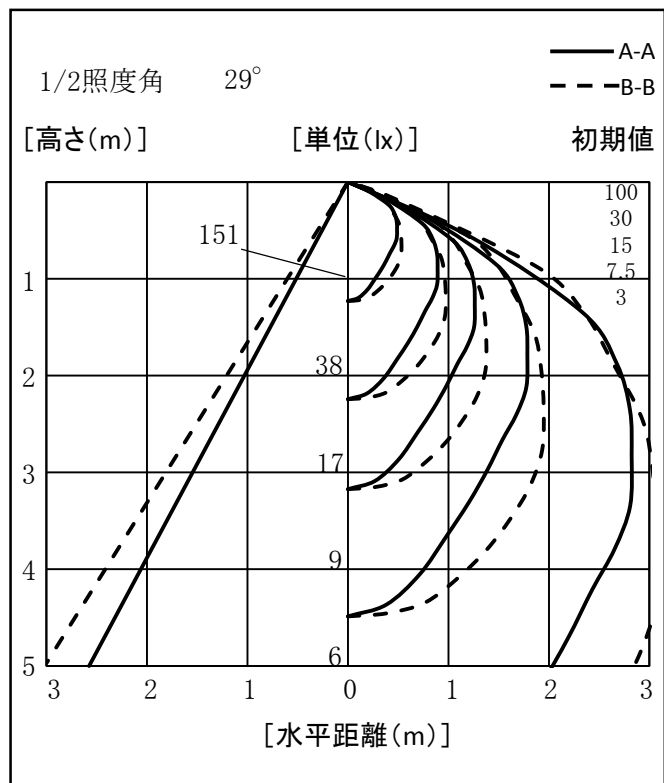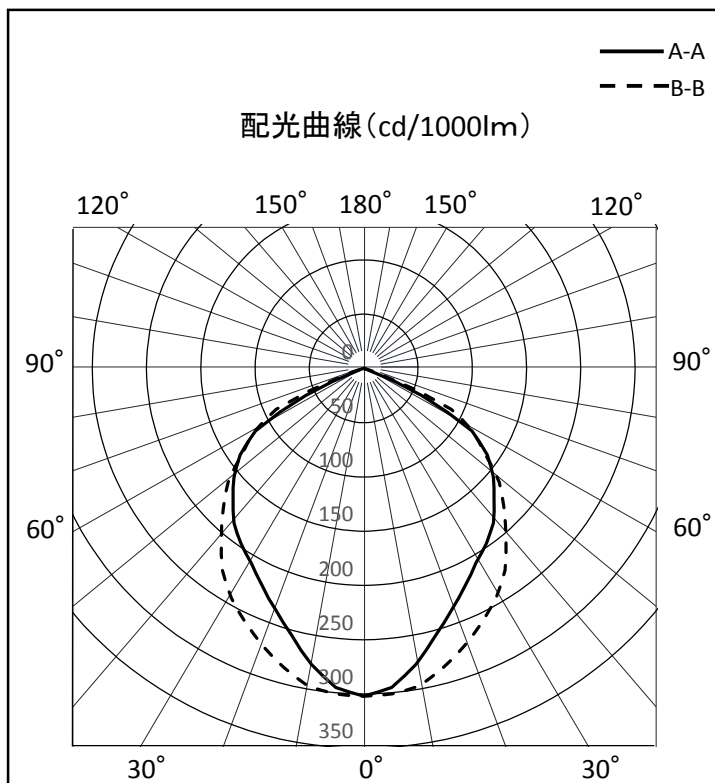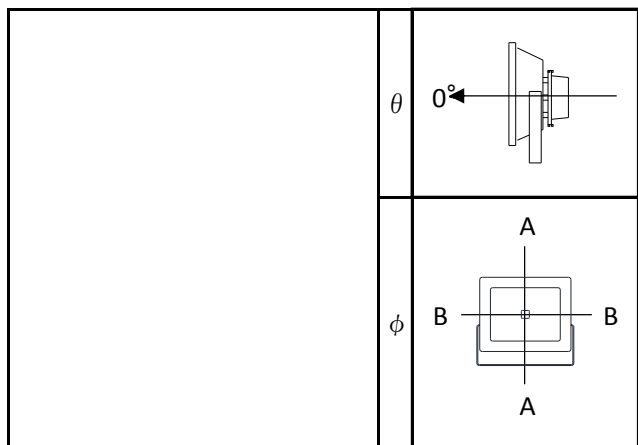

※LED素子にはバラツキがある為、発光色、明るさ等が異なる場合があります。

作成日 2014/09/24